


# Ionpure® LX-Z Continuous Electrodeionization (CEDI) Modules for Industrial Applications



## IONPURE LX-Z INDUSTRIAL CEDI MODULE

The Ionpure® LX-Z modules with improved chlorine tolerance are specifically designed for a wide range of industrial deionized water applications and markets, including boiler makeup water for power plants, water for hydrocarbon and chemical processing (HPI/CPI) and other high purity needs.

Ionpure CEDI modules provide a constant flow of high purity water without the need for downtime or chemical regeneration like conventional deionization methods.

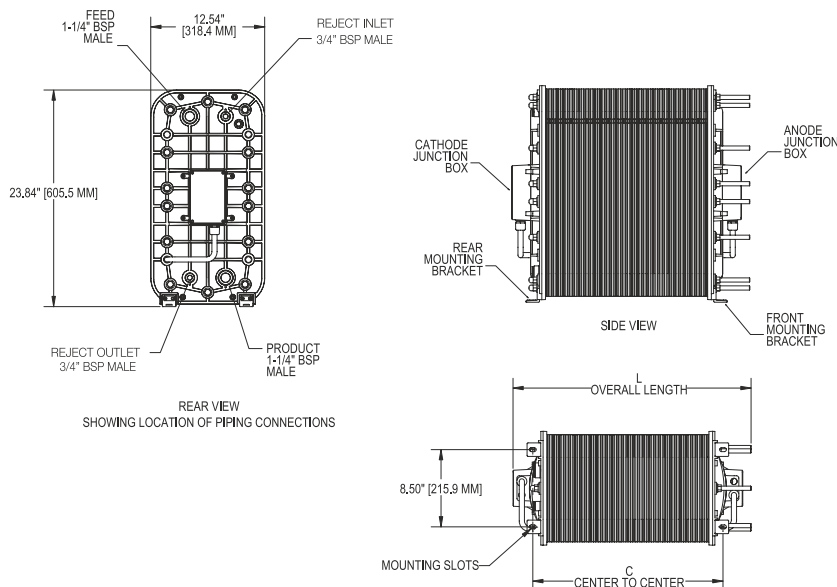

## QUALITY ASSURANCE STANDARDS

CE marked. Each module is factory tested to meet strict industry standards and is manufactured in an ISO 9001 and ISO 14000 quality and environmental management system.

\* Subject to terms of warranty

## LX-Z SERIES FEATURES

Wide range of flow from 0.22 m<sup>3</sup>/h (1 gpm) to 10m<sup>3</sup>/h (44 gpm) per module

Significantly lower operating costs than conventional ion exchange

Generates mixed-bed quality deionized water without the use of chemicals

Continuous production instead of batch, with consistent quality

Double O-ring seal guarantees\* leak-free operation

No need for acid/caustic, neutralization system or exchangeable DI tanks

Resin filled concentrate for optimal performance and ease of operation

Continuous operation

Up to 0.05 ppm (total Cl<sub>2</sub>) feed

Wetted materials of construction comply with NSF® 14 and NSF® 61 requirements

## OPERATING ENVIRONMENT

Installation should be indoors with no direct sunlight and should have a maximum ambient temperature of 113°F (45°C).

For additional information on our LX-Z industrial series of modules, call +1-866-876-3340 or visit our website at [www.ionpure.com](http://www.ionpure.com).

## TYPICAL MODULE PERFORMANCE

Operating Parameters	
Recovery	9095%
DC Voltage	0400
DC Amperage	1.06.0
Product Water Quality	
Product Resistivity	Minimum Flow > 17 MW-cm* Maximum Flow > 7 MW-cm*
Silica (SiO <sub>2</sub> ) Removal	9099%, depending on feed conditions

\* Actual performance may be determined using the IP-Pro projection tool available from Ionpure  
Performance based on maximum Feed Water Conductivity Equivalent (40 µS/cm).

## FEED WATER SPECIFICATIONS

Feed Water Conductivity Equivalent, including CO <sub>2</sub> and Silica	< 40 µS/cm
Feed Water Source	RO permeate
Temperature	545°C (41113°F)
Inlet Pressure	1.46.9 bar (20100 psig)
Maximum Total Chlorine (as Cl <sub>2</sub> )	< 0.05 ppm
Iron (as Fe)	< 0.01 ppm
Manganese (as Mn)	< 0.01 ppm
Sulfide (S <sup>2-</sup> )	< 0.01 ppm
pH	411
Total Hardness (as CaCO <sub>3</sub> )	< 1.0 ppm
Dissolved Organics (TOC as C)	< 0.5 ppm
Silica (SiO <sub>2</sub> )	< 1.0 ppm

## PHYSICAL SPECIFICATIONS

Item Number	L +/- 6.4 mm (0.25")	C +/- 3.2 mm (0.13")
LXM04Z	257 mm (10.12")	146.8 mm (5.78")
LXM10Z	347.7 mm (13.69")	235.7 mm (9.28")
LXM18Z	488.2 mm (19.22")	353.8 mm (13.93")
LXM24Z	601.7 mm (23.69")	442.7 mm (17.43")
LXM30Z	696.5 mm (27.42")	531.3 mm (20.92")
LXM45Z	907.3 mm (35.72")	747.7 mm (29.44")
LX8000Z	1062 mm (41.81")	888 mm (34.95")

## LX-Z FLOW RANGE AND WEIGHTS

Ordering Part #	Model Number	Minimum Flow Rate m <sup>3</sup> /hr (gpm)	Design Flow Rate m <sup>3</sup> /hr (gpm)	Shipping Weight kg (lbs)**	Operating Weight kg (lbs)
W3T17286	IP-LXM04Z-5	0.22 (1.0)	0.44-0.67 (2.0-3.0)	59 (130)	31 (69)
W3T17291	IP-LXM10Z-5	0.57 (2.5)	1.1-1.65 (5.0-7.5)	78 (171)	51 (113)
W3T17297	IP-LXM18Z-5	1.02 (4.5)	2.0-3.1 (9.0-13.5)	99 (217)	74 (163)
W3T17303	IP-LXM24Z-5	1.36 (6.0)	2.8-4.2 (12.5-18.8)	115 (254)	92 (103)
W3T17312	IP-LXM30Z-5	1.70 (7.5)	3.3-5.11 (15.0-22.5)	132 (291)	110 (243)
W3T17314	IP-LXM45Z-5	2.57 (11.3)	5.1-7.67 (22.5-33.8)	205 (451)	157 (345)
W3T584543	IP-LX8000Z-5	3.13 (13.75)	7.5 - 10 (33 - 44)	225 (496)	190 (419)

\*\* Includes shipping crate



## Geofluid Processors Private Limited

112, Building No.2, Mittal Industrial Estate,  
Andheri Kurla Road, Marol, Andheri (E), Mumbai - 400 059.

+91-22- 6155 5888  
info@geofluid.com

+91-22-6155 5800  
www.geofluid.com