

# CARBSORB 40

## Granular Activated Carbon


Test	Specification		Calgon Carbon Test Method
	Min	Max	
IODINE NUMBER, mg/g	1000	-	ASTM D4607
MOISTURE (AS PACKAGED), wt%	-	2	ASTM D2867
HARDNESS NUMBER	90	-	ASTM D3802
ASH, wt%	-	14	ASTM D2866
FLOATING CONTENT, wt%	-	6	AWWA B604
12 US MESH [1.70 mm], wt%	-	5	ASTM D2862
< 40 US MESH [0.425 mm] (PAN), wt%	-	4	ASTM D2862

### Typical Properties:

THIS PRODUCT IS NOT INCLUDED IN THE SCOPE OF CCC'S QUALITY SYSTEM CERTIFIED TO ISO 9001.

NOTE: CCC'S Quality System elements are applied whenever possible.

**Calgon Carbon Corporation's activated carbon products are continuously being improved and changes may have taken place since this publication went to press. 11230-01/29/2019**

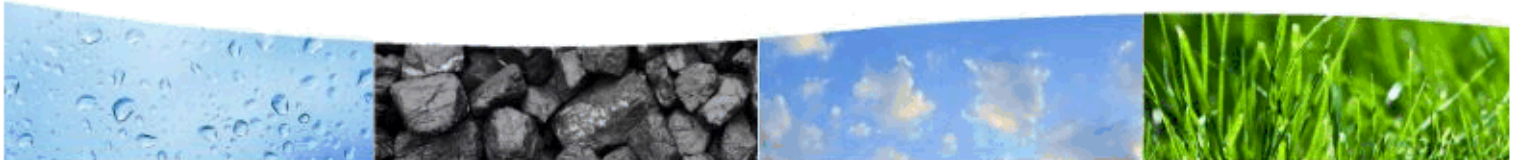

+1 800 422 7266 [calgoncarbon.com](http://calgoncarbon.com)

