

## DECOLOURCARB DCL330-N

Wood Powder Activated Carbon


Test	Specification		Calgon Carbon Test Method
	Min	Max	
MOLASSES NUMBER	750	-	TM-3
pH (EXTRACTABLE) (ASTM)	4	6	ASTM D3838
MOISTURE (AS PACKAGED), wt%	-	10	TM-1,ASTM D2867
ASH, wt%	-	5	ASTM D2866,TM-5
< 325 US MESH [0.045 mm], wt%	60	85	TM-13,JIS K 1474

### Typical Properties:

This product complies with the requirements for activated carbon as defined by the Food Chemicals Codex (FCC) (Latest Edition) published by the U.S. Pharmacopeia.

THIS PRODUCT IS NOT INCLUDED IN THE SCOPE OF CCC'S QUALITY SYSTEM CERTIFIED TO ISO 9001.  
NOTE: CCC'S Quality System elements are applied whenever possible.

**Calgon Carbon Corporation's activated carbon products are continuously being improved and changes may have taken place since this publication went to press. 19684-09/25/2018**

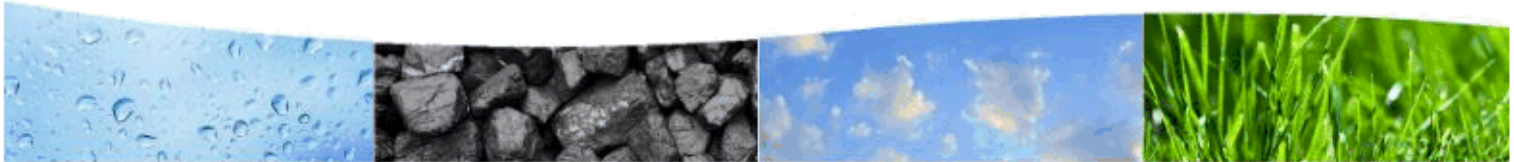

+1 800 422 7266 [calgoncarbon.com](http://calgoncarbon.com)



### Geofluid Processors Private Limited

112, Building No.2, Mittal Industrial Estate,  
Andheri Kurla Road, Marol, Andheri (E), Mumbai - 400 059.

+91-22- 6155 5888  
info@geofluid.com

+91-22-6155 5800  
www.geofluid.com